


ATISmirus 200

ATISmirus 200

Pneumatic manipulator with swivel rigid arms, is the higher capacity model of ATISmirus 100. Developed with the same technical and structural characteristics, is equipped with an additional pneumatic cylinder to obtain higher capacities and longer radiuses. Also this manipulator can be integrated with a customized gripping tool to comply with customers' needs.

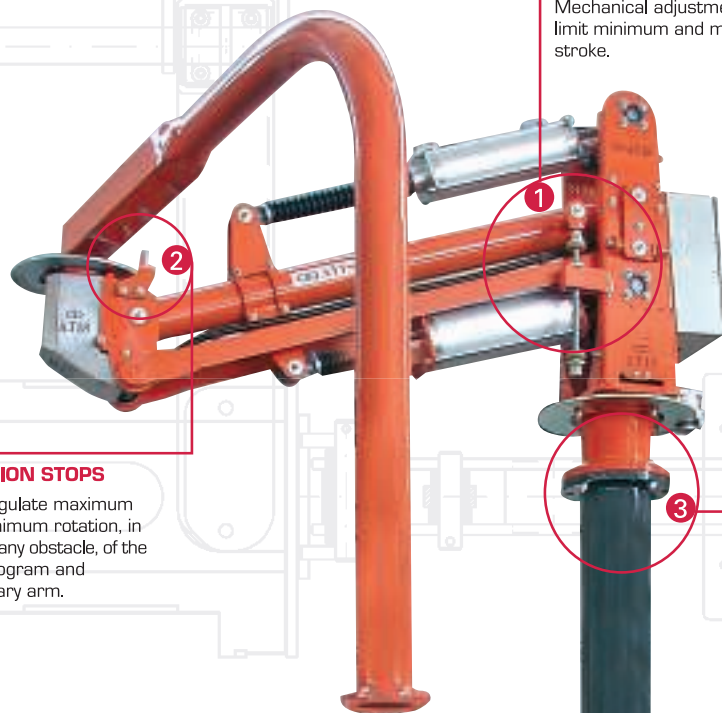

MECHANICAL STROKE REGULATION

Mechanical adjustment to limit minimum and maximum stroke.

ROTATION STOPS

They regulate maximum and minimum rotation, in case of any obstacle, of the parallelogram and secondary arm.

ATTACHMENT FLANGE

Fixing point for column or overhead configurations.



FIXING PLATE

It fixes the column to the ground or to self standing base.

ATISmirus 200 CONFIGURATION

- ✓ column mounted fixed to the floor
- ✓ column mounted on self standing base
- ✓ overhead
- ✓ overhead on rails

MAXIMUM CAPACITY
260 kg

RADIUS
3,3 m

VERTICAL STROKE
2,1 m

OFFSET LOADS