

# ATISacer 55

Wire rope rigid arm manipulator developed for balanced loads up to 55 kg. It stands out for its easy control and for the double wire rope vertical stroke.

Light and space-saving, it solves many lifting requirements even in small spaces and can be integrated with customized tooling for specific products.

# ATISacer 55

## ACCUMULATION TANK

Allows the carrying out of the working cycle in case of air supply failure. Certified tank.

5

## COMPRESSED AIR CONNECTION

Column mounted air connection with protected internal piping up to the main pneumatic box.

4

## MACHINE BODY

Integrated in the secondary arm, developed for column or overhead configuration.

1

## BALANCING CYLINDERS

Low friction cylinders developed with special Atis technology.

2

## DISC BRAKE


Metallic discs with single pad brake

6

## BALANCING REGULATOR

Allows a mechanical adjustment while balancing loads.

3

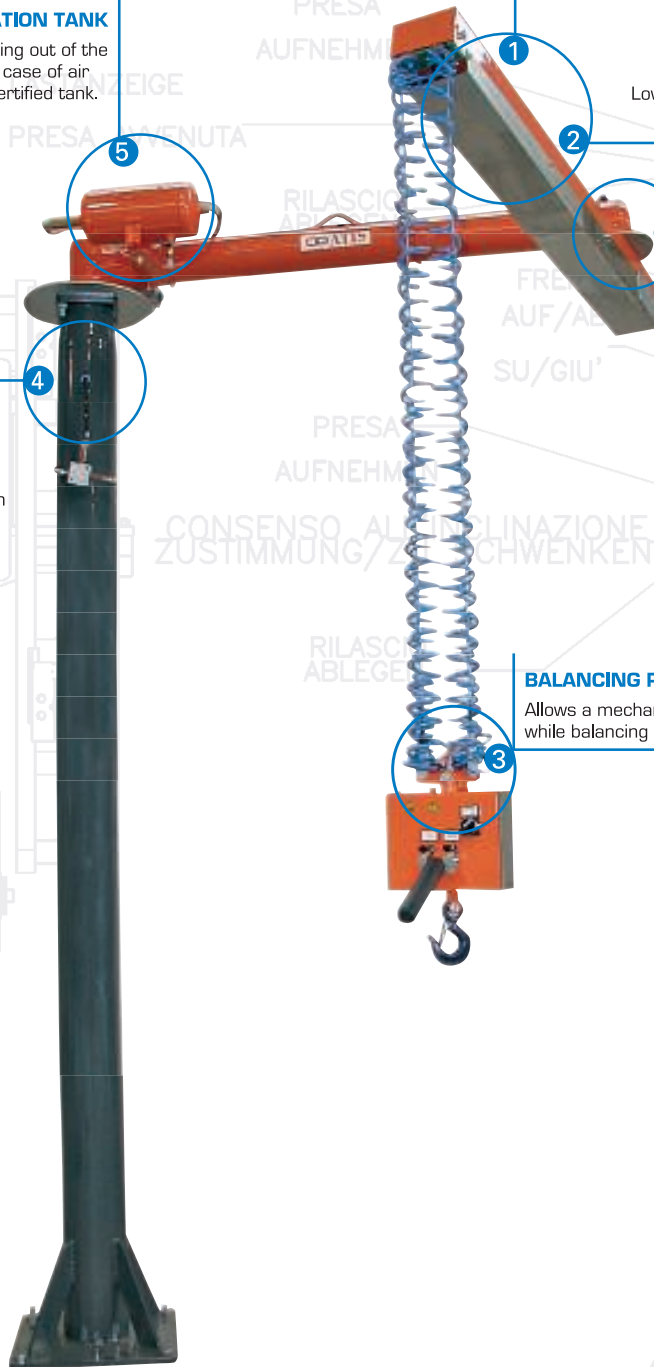

MAXIMUM CAPACITY

55 kg

RADIUS

3,5 m

VERTICAL STROKE

1,6 m

CENTRE OF GRAVITY LIFTING

## ATISacer 55 CONFIGURATION

- ✓ column mounted fixed to the floor
- ✓ column mounted on self standing base
- ✓ overhead
- ✓ overhead on rails